




M-375G

375 GALLON 3" HIGH-SHEAR BENTONITE GAS MIXING SYSTEM

FULL-YIELD MUD IN UNDER FIVE MINUTES.

Designed for mini HDD rigs and tunnelers, the M-375G combines a 375-gallon polyethylene tank with a 10 hp gasoline engine, 3-inch centrifugal pump, and STS four-point mixing system. Its compact form is easy to transport and produces full-yield mud quickly.

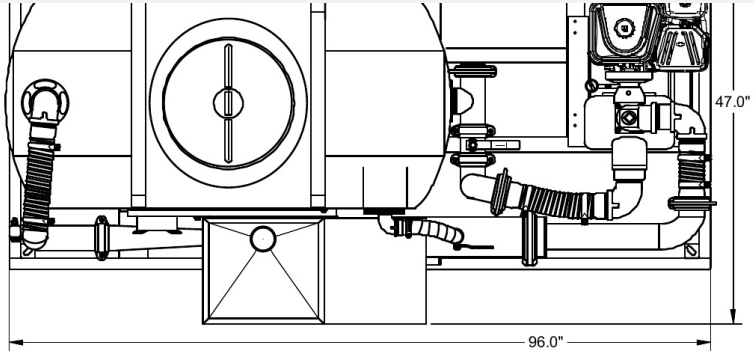

SPECIFICATIONS

SPECIFICATION	MODEL	FIELD BENEFIT
Dimensions	47" W x 96" L x 69" H	Small, space-saving footprint.
Weight	1,130 lb	Lightweight for easy transportation.
Hopper Height	37" high	Waist-high hopper reduces back strain.
Mixing System	3" proprietary STS mixing system	Fast and efficient; about five minutes.
Mixing Tank	375 US gal polyethylene	Minimal maintenance required.
Skid Frame	4" welded steel channel	Built tough for construction.
Engine	10 hp air-cooled, manual start	Industrial-rated for longer service life.
Pump	3" cast-iron centrifugal trash pump	Rugged and repairable.
Pump Coupling	Direct-coupled engine and pump	No expensive couplers or inserts to replace.
Drill Fluid Outlet	1 1/2" NPT with full-flow ball valve	Large-volume discharge.
Pipe Couplers	Bolt and snap-groove type	Fast cold-weather system draining.
Pressure Wand	Hopper maintenance wand	Removes additive blockages.
Tank Drain	Bottom tank drain supplied	Fast cold-weather tank drainage.

ALSO AVAILABLE IN ELECTRIC (M-375E), HYDRAULIC (M-375H), OR DIESEL (M-375D).

All specifications are subject to change without notice.

SURFACE TO SURFACE INC.

2000 Rogers Road, Perth, ON K7H 1P9
800-567-0978

STSMIXERS.COM

HIGH-SHEAR MIXING SYSTEMS

REV. 10/2026