




M-750G

750 GALLON 4" HIGH-SHEAR BENTONITE GAS MIX SYSTEM

750 GALLONS OF FULL-YIELD MUD IN UNDER EIGHT MINUTES.

The M-750G pairs a space-saving 750-gallon roto-mold tank with a 23 hp electric-start gasoline engine, 4-inch centrifugal pump, and STS four-point mixing system. It can draw water from a second tank and send mud to a rig or storage tank without a second pump.

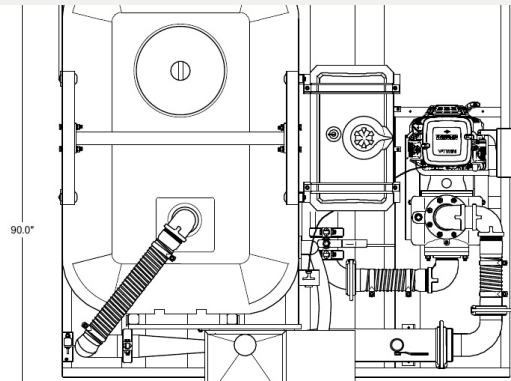

SPECIFICATIONS

SPECIFICATION	MODEL	FIELD BENEFIT
Dimensions	92" W x 90" L x 75" H	Fits an 8-foot flat deck efficiently.
Approx. Weight	2,010 lb	Balanced jobsite footprint.
Hopper Height	42" high	Waist-high hopper reduces back strain.
Mixing System	4" proprietary STS mixing system	Fast, efficient mixing; about seven minutes.
Mixing Tank	750 gal roto-mold polyethylene	Minimal maintenance required.
Skid Frame	5" welded steel channel	Built for construction use.
Gasoline Engine	23 hp air-cooled, electric start	Industrial-rated for long service life.
Pump	4" cast-iron centrifugal trash pump	Rugged and repairable.
Drive Coupling	Direct-coupled engine and pump	No expensive couplers or inserts to replace.
Mechanical Seal	Self-pressurizing grease seal	Suited to rugged working conditions.
Replaceable Wear Plate	Hardened plate ahead of impeller	Reduces internal pump wear; replaceable.
Fuel Tank	15 gal plastic tank	Provides a full day of running.
Pipe Couplers	Bolt and snap-groove type	Fast cold-weather maintenance.
Pressure Wand	Hopper maintenance wand	Removes additive build-up.
Tank Drain	Bottom tank drains supplied	Fast cold-weather tank drainage.

ALSO AVAILABLE IN DIESEL (M-750D), HYDRAULIC (M-750H), OR ELECTRIC (M-750E).

All specifications are subject to change without notice.

SURFACE TO SURFACE INC.

2000 Rogers Road, Perth, ON K7H 1P9
800-567-0978

STSMIXERS.COM

HIGH-SHEAR MIXING SYSTEMS

REV. 10/2026